

No setup time and machine downtime




Center drilling + chamfering

VDP head

2 flutes for center drilling + chamfering (DIN332)

- **Range:** from $\varnothing 3.28$ to $\varnothing 6.46$ mm with 60° chamfer

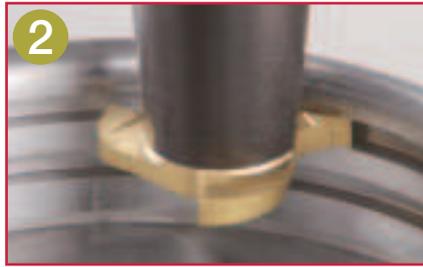


Shallow slotting

VST head

3, 4, 6 flutes for slot milling solution

- Form slotting operation
- Chamfering operation
- **Width range:** from 0.76 to 10 mm with slotting depth up to 6 mm

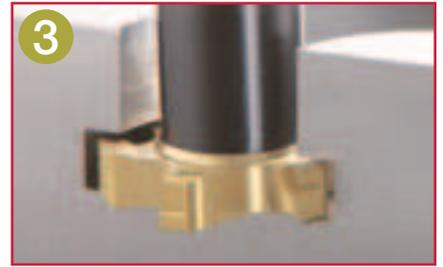

T-Slot milling

VTB head

6 flutes for high productivity

- Form slotting operation
- Slotting with corner radius and chamfer
- **Width range:** from 2 to 8 mm with slotting depth up to 5.9 mm



Roughing & finishing combination head

VEE-C head

4 flutes / 45° helix

- Reduces cutting load and vibration due to combined roughing and finishing flutes
- **Range:** from $\varnothing 8$ to $\varnothing 20$ mm with possibility to machine almost any material



Concave radius milling

VCR head

2 flutes with concave radius

- For edge breaking and deburring
- Useful for machining edges of pockets or holes for easy entry of male parts in an assembly
- **Range:** from $\varnothing 8$ to $\varnothing 20$ mm with concave radii of R1 to R6 mm

