


Для универсального сверления

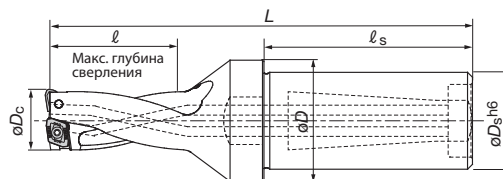

Пожалуйста, обратите внимание что новый тип TDX отличается от старого типа TDX общей длиной (L).

L/D = 2

Диам. сверла øDs	Кат. №	Наличие	Размеры (мм)					Макс. смещ.	Применяемые пластины	Зажимной винт	Ключ						
			øDs	øD	l	ls	L										
12.5	TDX125W20-2	●	20	25	25	43	87.5	0.8	XPMT040104R-D*	CSTB-2	T-6D						
13.0	TDX130W20-2	●			26		89.0	0.7									
13.5	TDX135W20-2	●			27		90.5	0.5									
14.0	TDX140W20-2	●			28		92.0	0.4									
14.5	TDX145W20-2	●			29		93.5	0.3									
15.0	TDX150W20-2	●			30		95.0	0.9									
15.5	TDX155W20-2	●			31		96.5	0.8									
16.0	TDX160W20-2	●			32		98.0	0.6									
16.5	TDX165W20-2	●			33		99.5	0.5									
17.0	TDX170W20-2	●			34		101.0	0.4									
17.5	TDX175W25-2	●	25	32	35	50	109.5	1.2	XPMT06X308R-D*	CSTB-2.2R	T-7D						
18.0	TDX180W25-2	●			36		111.0	1.1									
18.5	TDX185W25-2	●			37		112.5	0.9									
19.0	TDX190W25-2	●			38		114.0	0.8									
19.5	TDX195W25-2	●			39		115.5	0.7									
20.0	TDX200W25-2	●			40		117.0	0.5									
20.5	TDX205W25-2	●			41		118.5	0.4									
21.0	TDX210W25-2	●			42		120.0	0.3									
21.5	TDX215W25-2	●			43		121.5	0.2									
22.0	TDX220W25-2	●			44		123.0	1.2									
22.5	TDX225W25-2	●	32	40	45	55	124.5	1.1	XPMT07H308R-D*	CSTB-2.5	T-8D						
23.0	TDX230W25-2	●			46		126.0	0.9									
23.5	TDX235W25-2	●			47		127.5	0.8									
24.0	TDX240W25-2	●			48		129.0	0.7									
24.5	TDX245W25-2	●			49		130.5	0.5									
25.0	TDX250W25-2	●			50		132.0	0.4									
25.5	TDX255W25-2	●			51		133.5	0.3									
26.0	TDX260W25-2	●			52		135.0	0.2									
27.0	TDX270W32-2	●			32		50	54				65	143.0	1.5	XPMT08T308R-D*	CSTB-3	T-9D
28.0	TDX280W32-2	●						56					146.0	1.2			
29.0	TDX290W32-2	●	58	149.0		1.0											
30.0	TDX300W32-2	●	60	152.0		0.7											
31.0	TDX310W32-2	●	62	155.0		0.4											
32.0	TDX320W32-2	●	64	158.0		0.2											
33.0	TDX330W40-2	●	40	55		66		75	171.0	2.3	XPMT110412R-D*		CSTB-4	T-15D			
34.0	TDX340W40-2	●				68			174.0	2.1							
35.0	TDX350W40-2	●				70			177.0	1.8							
36.0	TDX360W40-2	●				72			180.0	1.5							
37.0	TDX370W40-2	●			74	183.0	1.3										
38.0	TDX380W40-2	●			76	186.0	1.0										
39.0	TDX390W40-2	●			78	189.0	0.7										
40.0	TDX400W40-2	●			80	192.0	0.5										
41.0	TDX410W40-2	●			82	195.0	0.2										
42.0	TDX420W40-2	●			40	55	84		85	198.0		3.1			XPMT150512R-D*	CSTB-5	T-20D
43.0	TDX430W40-2	●	86	201.0			2.9										
44.0	TDX440W40-2	●	88	204.0			2.6										
45.0	TDX450W40-2	●	90	207.0			2.3										
46.0	TDX460W40-2	●	92	210.0			2.1										
47.0	TDX470W40-2	●	94	213.0			1.8										
48.0	TDX480W40-2	●	96	216.0			1.5										
49.0	TDX490W40-2	●	98	219.0			1.3										
50.0	TDX500W40-2	●	100	222.0			1.0										
51.0	TDX510W40-2	●	102	225.0			0.7										
52.0	TDX520W40-2	●	104	228.0	0.5												
53.0	TDX530W40-2	●	106	231.0	-												
54.0	TDX540W40-2	●	108	234.0	-												

Примечание: L/D = Глубина отверстия/Диаметр сверла

● : Складские позиции