




Для центрования, снятия фасок, конического зенкования

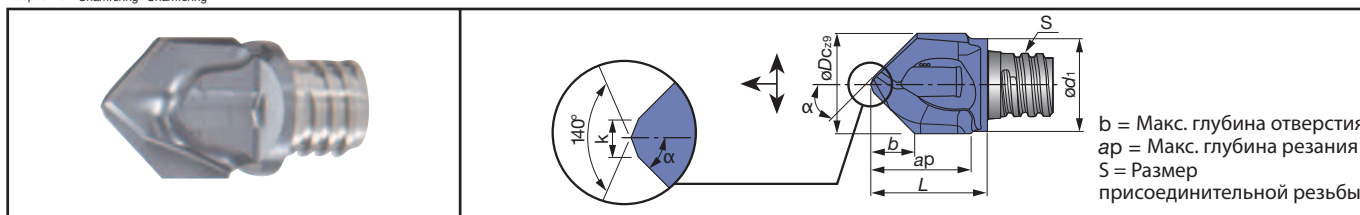

**Угол при вершине = 60°**

Кат. №	Сплав АН725	Кол-во зубьев	Угол спирали	Размеры (мм)								Ключ	Крутящий момент (N·m)
				ØDc	Ød1	ap	b	S	L	k	α		
VCP100L09.5A30-02S06	●	2	0°	10.0	9.5	8.5	7.5	S06	11.75	1.5	30°	KEYV-S06	10
VCP120L12.0A30-02S08	●	2	0°	12.0	11.5	11	9.2	S08	15.4	1.5	30°	KEYV-S08	15
VCP160L15.0A30-02S10	●	2	0°	16.0	15.2	16	12.0	S10	20.2	2.5	30°	KEYV-S10	28

● Минимальная фаска: Ø1.5 mm

**Угол при вершине = 90°**

Кат. №	Сплав АН725	Кол-во зубьев	Угол спирали	Размеры (мм)								Ключ	Крутящий момент (N·m)
				ØDc	Ød1	ap	b	S	L	k	α		
VCP080L07.7A45-02S05	●	2	0°	8.0	7.6	7.5	3.7	S05	9.75	1.0	45°	KEYV-S05	7
VCP083L07.9A45-02S05	●	2	0°	8.3	7.6	7.5	3.8	S05	10.0	1.0	45°		
VCP100L09.0A45-02S06	●	2	0°	10.0	9.5	9.5	4.4	S06	11.75	1.5	45°	KEYV-S06	10
VCP104L09.0A45-02S06 <sup>(1)</sup>	●	2	0°	10.4	9.5	9.5	4.6	S06	11.75	1.5	45°		
VCP120L12.0A45-02S08	●	2	0°	12.0	11.5	11.5	5.4	S08	15.4	1.5	45°	KEYV-S08	15
VCP124L12.0A45-02S08 <sup>(1)</sup>	●	2	0°	12.4	11.5	11.5	5.6	S08	15.4	1.5	45°		
VCP160L15.0A45-02S10	●	2	0°	16.0	15.2	15	7.1	S10	18.8	1.5	45°	KEYV-S10	28
VCP165L15.0A45-02S10	●	2	0°	16.5	15.2	15	7.1	S10	18.8	1.5	45°		

● Минимальная фаска: Ø1.5 mm

**Угол при вершине = 120°**

Кат. №	Сплав АН725	Кол-во зубьев	Угол спирали	Размеры (мм)								Ключ	Крутящий момент (N·m)
				ØDc	Ød1	ap	b	S	L	k	α		
VCP100L09.5A60-02S06	●	2	0°	10.0	9.5	9.5	2.7	S06	12.7	1.5	60°	KEYV-S06	10
VCP120L12.0A60-02S08	●	2	0°	12.0	11.5	11.5	3.3	S08	15.2	1.5	60°	KEYV-S08	15
VCP160L15.5A60-02S10	●	2	0°	16.0	15.2	16	4.4	S10	19.9	1.5	60°	KEYV-S10	28

● Минимальная фаска: Ø1.5 mm

● : Складские позиции/Упаковочная единица =2 шт

10

Концевые фрезы