




Для фрезерования пазов

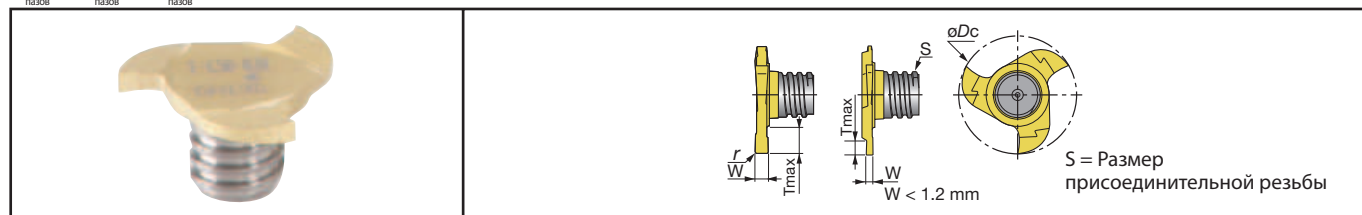

| Кат. № | Сплав GH130 | Кол-во зубьев | Угол спирали | Размеры (мм) | | | | | Ключ | Крутящий момент (N·m) |
|----------------------|----------------|------------------|-----------------|------------------|---------------------|------|-----|------|----------|--------------------------|
| | | | | $\varnothing Dc$ | $W_{\pm 0.02}$ | r | S | Tmax | | |
| VST157W1.50R010-3S06 | ● | 3 | - | 15.7 | 1.50 | 0.10 | S06 | 2.8 | KEYV-177 | 10 |
| VST157W1.57R020-3S06 | ● | 3 | - | 15.7 | 1.57 | 0.20 | S06 | 2.8 | | |
| VST157W2.00R020-3S06 | ● | 3 | - | 15.7 | 2.00 | 0.20 | S06 | 2.8 | | |
| VST157W2.39R020-3S06 | ● | 3 | - | 15.7 | 2.39 | 0.20 | S06 | 2.8 | | |
| VST157W2.50R020-3S06 | ● | 3 | - | 15.7 | 2.50 | 0.20 | S06 | 2.8 | | |
| VST157W3.00R020-3S06 | ● | 3 | - | 15.7 | 3.00 | 0.20 | S06 | 2.8 | | |
| VST157W3.17R020-3S06 | ● | 3 | - | 15.7 | 3.17 | 0.20 | S06 | 2.8 | | |
| VST177W1.20R005-3S06 | ● | 3 | - | 17.7 | 1.20 ⁽¹⁾ | 0.05 | S06 | 3.8 | | |
| VST177W1.40R005-3S06 | ● | 3 | - | 17.7 | 1.40 ⁽¹⁾ | 0.05 | S06 | 3.8 | | |
| VST177W1.50R010-3S06 | ● | 3 | - | 17.7 | 1.50 | 0.10 | S06 | 3.8 | | |
| VST177W1.57R020-3S06 | ● | 3 | - | 17.7 | 1.57 | 0.20 | S06 | 3.8 | | |
| VST177W1.70R005-3S06 | ● | 3 | - | 17.7 | 1.70 ⁽¹⁾ | 0.05 | S06 | 3.8 | | |
| VST177W2.00R020-3S06 | ● | 3 | - | 17.7 | 2.00 | 0.20 | S06 | 3.8 | | |
| VST177W2.20R110-3S06 | ● | 3 | - | 17.7 | 2.20 | 1.10 | S06 | 3.8 | | |
| VST177W2.39R020-3S06 | ● | 3 | - | 17.7 | 2.39 | 0.20 | S06 | 3.8 | | |
| VST177W2.50R020-3S06 | ● | 3 | - | 17.7 | 2.50 | 0.20 | S06 | 3.8 | | |
| VST177W3.00R020-3S06 | ● | 3 | - | 17.7 | 3.00 | 0.20 | S06 | 3.8 | | |
| VST177W3.17R020-3S06 | ● | 3 | - | 17.7 | 3.17 | 0.20 | S06 | 3.8 | | |

(1) W для стопорных колец DIN471 / 472

● : Складские позиции/Упаковочная единица =2 шт

10

Концевые фрезы